




SQUALE mini S4 for sealed connection up to 3 conductors and wire 4 mm² (x 8)

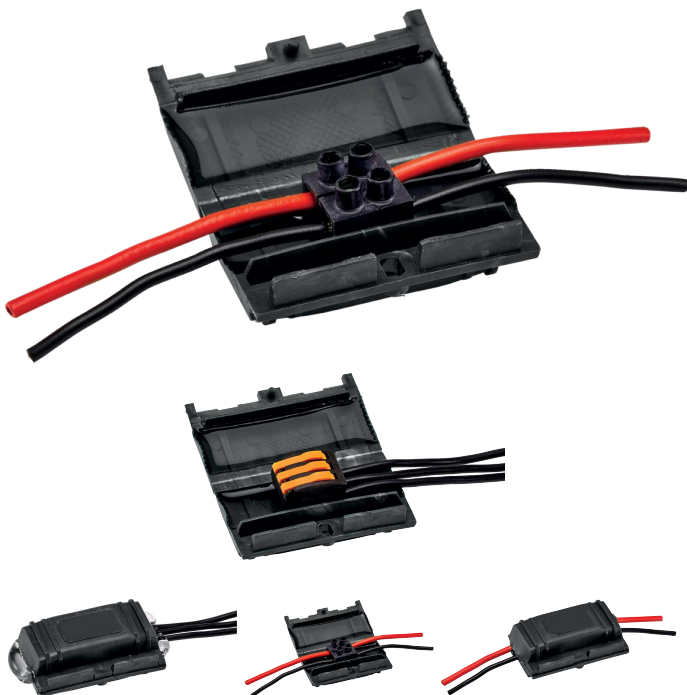

Characteristics

Capacity 1 conductor (mm²): **1-4**
 Capacity 2 conductors (mm²): **1-4**
 Dimensions (mm): **61 x 18**
 Quantity per box : **8**

Norms

- ☑ EN 50393 ; EN 60529
- ☑ IP X8

Benefits

- Quick repair of your damaged cables.
- Non toxic.

Compliance marks



GENERAL INFORMATION

Description

Connector's sealing cover for wires with a section up to 4 mm².
 Connection system not included.

Technical details

Pre-filled with neutral insulating gel.
 Installation temperature (°C): -40 to +50.
 Operating temperature (°C): 90.
 Maximum cable diameter (mm): 10.

Application(s)

Ensures quick and safe sealing of your connections.
 Ideal in outdoor, damp or immersed environments when it is a cable protected by the cable outer sheath installed in the SQUALE MINI (up to 3 m).
 Ideal in outdoor and in a derivation box when wires are not protected by a cable outer sheath.

Instructions

1. **1.** Make your connection using a block or a connection terminal.
2. **2.** Insert your connection into the SQUALE MINI.
3. **3.** Close the SQUALE MINI, check that the gel slightly protrudes from the SQUALE MINI by winding the wires and/or the cable.

LOGISTIC INFORMATION

Packaging



Carton box

Height (cm) : 11
 Length (cm) : 12
 Depth (cm) : 7
 Net weight (kg) : 0,28
 Gross weight (kg) : 0,28



Outer package 1



Carton box

Height (cm) : 44
 Length (cm) : 50
 Depth (cm) : 38
 Net weight (kg) : 28
 Gross weight (kg) : 28,6



x 100.00

Outer package 2



Pallet

Height (cm) : 105
 Length (cm) : 80
 Depth (cm) : 120
 Net weight (kg) : 228,8
 Gross weight (kg) : 260



x 800.00