


# Hanging light ceiling suspension $\varnothing$ 1.5 x 400 mm (x 10)

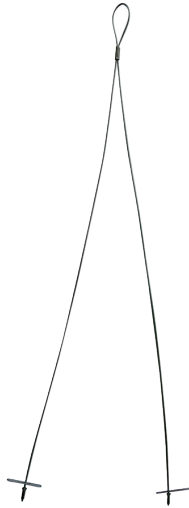

## Characteristics

Cable  $\varnothing$  (mm) : **1.5**  
 Numbers of bits : **2**  
 Tip length (mm) : **40**  
 Length of strands (mm) : **400**  
 Load accepted (kg) : **15**  
 Quantity per box : **10**

## Benefits

- Quick and simple installation without a specific tool.
- Single anchor point with no adjustment.

## GENERAL INFORMATION

### Description

Suspension system with end cap at each end.

### Technical details

Cable: galvanised steel (EN12385).  
 Tilting plate and stop: zinc-plated steel.  
 Strand length 400 mm.  
 End cap length 40 mm.

### Advices

Follow the minimum and maximum operating loads.  
 Check that the cable has no traces of oil, paint or rust.  
 Do not use outdoors or in a chlorinated, marine or corrosive environment.  
 Do not use for lifting.  
 Use only for the suspension of equipment under static load.  
 Do not use for suspension at more than 60° from the vertical.

### Application(s)

For suspension of all types of lighting.  
 Compatible with suspension locks BIZ 710 405, BIZ 710 406 and BIZ 710 408.  
 Compatible with cables BIZ 710 350, BIZ 710 351, BIZ 710 352 and BIZ 710 353.

## LOGISTIC INFORMATION

### Packaging



#### Plastic box

Height (cm) : 6  
 Length (cm) : 20,5  
 Depth (cm) : 8,9  
 Net weight (kg) : 0,15  
 Gross weight (kg) : 0,21



### Outer package 1



#### Carton box

Height (cm) : 14  
 Length (cm) : 42  
 Depth (cm) : 28  
 Net weight (kg) : 2,52  
 Gross weight (kg) : 3



x 12

### Outer package 2



#### Pallet

Height (cm) : 120  
 Length (cm) : 80  
 Depth (cm) : 110  
 Net weight (kg) : 90  
 Gross weight (kg) : 100



x 360